

K&F CA 1515-9

- 2-way full range system 15"/1.5"
- Passive crossover with time alignment correction
- Very precise coverage in horizontal and vertical axes, rotatable horn
- Multifunctional enclosure
- 130 dB max. SPL
- Optional operation with K&F SystemAmps



The CA 1515-9 is the logically consistent development of the successful CA series. This compact full-range high-power loudspeaker system provides a 15" LF-transducer, a 1.5" compression driver and a passive crossover network. Regardless to its small dimensions the especially developed 15" chassis gives the CA 1515 an impressive bass reproduction. The CA 1515 systems are suitable for any programme source and flexible in use, such as main system, center-speaker, side-, drum- and downfill or as stage monitor.

With a coverage of 90° x 50°, the CA 1515-9 is best suited for nearfield applications as well as for middle distances. The extensive horn aperture in combination with the high acoustic capability of the 1.5" horn results in excellent speech intelligibility even at higher distances. Constant directivity of the horn section together with a linear and phase coherent crossover provide high maximum sound pressure, low feedback tendency and excellent omnidirectional coverage. This makes the CA 1515-9 sound very open and free of coloration with high precision and power, which complies perfectly with a usage as stage monitor.


In addition, multiple innovative detail solutions make the CA 1515 system an allrounder with plug-and-play features, such as the asymmetric multi-angle enclosure, which provides acoustic advantages as well as multiple mounting-options: pole-mounted, flown single or in a cluster and as a floor wedge. Furthermore, „butterfly“-handles for easy transport, driver protection and a 90° rotatable horn to fit the directivity for multiple applications. Optionally, the result of the CA 1515-9 can be enhanced with the K&F SystemAmps.

The professional user will be convinced of versatility, power capability and sound of the new CA 1515 systems.


K&F CA 1515-9	
Design	Passive 2-way bass reflex system
Operation with	K&F PLM+ Series, K&F D Series, K&F IPX 2400, Lab.gruppen IPD 2400 ¹ , K&F SystemRack ¹ , passive with linear amplifiers
Frequency response -10 dB	48 Hz – 22 kHz
Frequency response ±3 dB	75 Hz – 19 kHz
Coverage angles nominal	90° x 50° (hor. x vert.), CD horn rotatable
Power handling nominal	500 watts
Power handling program	1.000 watts
Power handling peak	2.000 watts
Max. SPL	130 dB (SPL peak/1 m)
Impedance nominal	8 Ω
Loudspeaker per channel	See matrix
Components	1.5" high frequency driver with 75 mm Titanium diaphragm, 15" low-mid chassis, 1.1 kHz 12 dB/octave, automatic resettable driver protection, passive allpass filter for time alignment and phase optimization
Connectors	2 x speakON® 4-pol NLT4MP (+1/-1) IN parallel to OUT
Enclosure	
	Multi-functional enclosure out of 15 mm multiplex with highly resistant structured paint (PU) in RAL 9005 (black), 55° monitor angle, cluster angle, 2 ergonomical butterfly handles, internale pole mount, 4 non-abrasive plastic sliders on monitor angle, 5 flying points 'allsafe JUNGFALK', ball-proof steel grill with exchangeable black acoustic foam
Dimensions (W x H x D)	434 x 680 x 411 mm
Weight	36.4 kg
Colour	RAL 9005 (black) RAL special colour
Options	'AS' axial symmetrical version '100 V' with 300 VA toroidal transformer (38.9 kg) 'Barrier strip' instead of 'speakON®' connectors 'Outdoor Mobile' 'Outdoor Installation'
Accessories	See catalogue or www.kling-freitag.com

¹ Discontinued


Horizontal coverage pattern

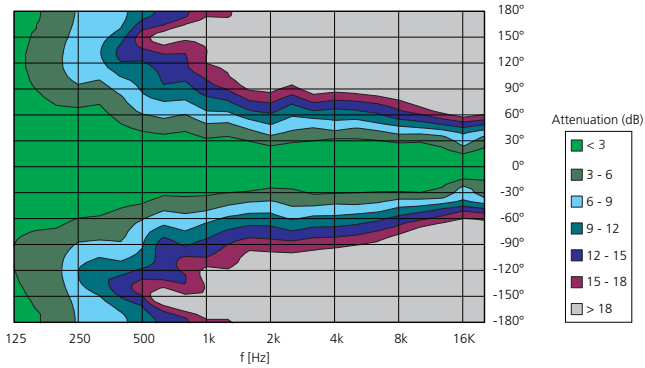


Vertical coverage pattern

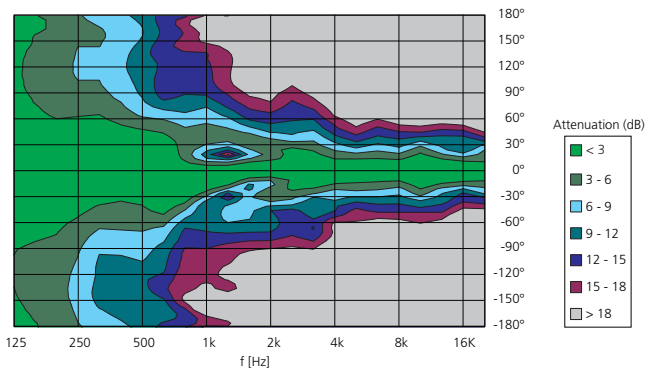


Frequency response 'on axis'

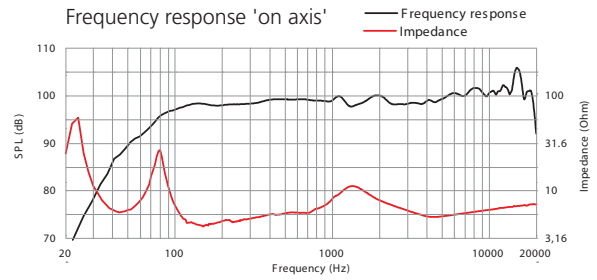


Beamwidth

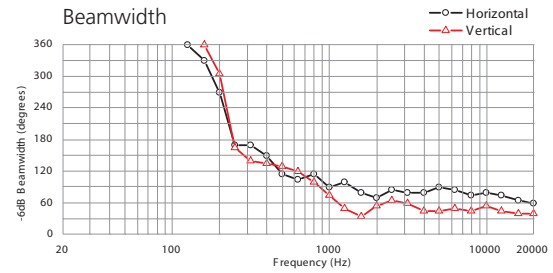

Directivity

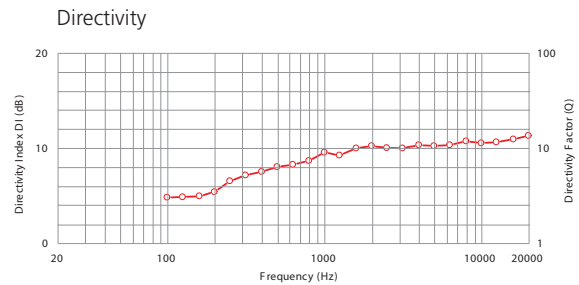

All measurements under free field conditions. Frequency patterns 1/6 octave averaged. Coverage and polar pattern 1/3 octave averaged. The manufacturer reserves the right to make product alterations to improve product quality without prior notice. Errors excepted.

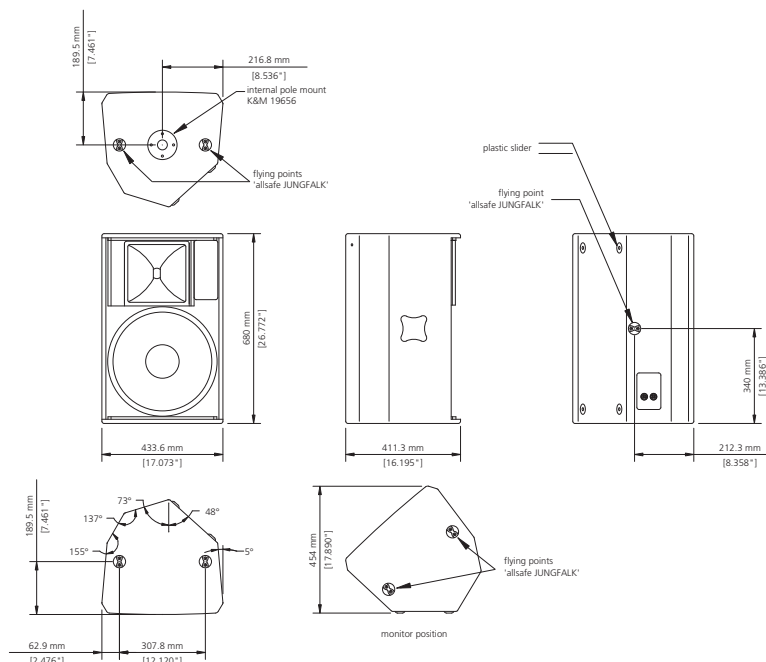

Further information and data like specifications, manuals, technical drawings as DWG, DXF and PDF files as well as data files for acoustic simulations with Ease and Ulysses are available on our web site www.kling-freitag.de

KLING & FREITAG GmbH
Wohlenbergstr. 5
D-30179 Hannover
Tel. +49 (0)511 96 99 7-0
Fax +49 (0)511 96 99 7-97