

K&F NOMOS LS II

- High-performance 1 x 15" subwoofer
- Operation with K&F SystemAmps
- Frequency response 33 Hz (-10 dB)
- Maximum sound pressure level of 136 dB (SPL peak/1 m/half space)



The K&F NOMOS LS II is a compact 15" bass reflex subwoofer intended for the highest demands. Equipped with a 15" premium chassis with a neodymium magnet and 100 mm voice coil, this subwoofer is to be operated over the K&F SystemAmps only – a combination which guarantees, especially in pro. RENTAL operations, maximum operating reliability, perfect performance and compatibility in the 'dry hire' business. The NOMOS LS II in both single and multiple applications is ideal for the low frequency response of the K&F line arrays SEQUENZA and the full range systems GRAVIS, CA-, Line Series and the horn-loaded ACCESS T5/T9.


As with the complete range, the NOMOS LS II has a discreet and functional design. The front of the speaker is protected by a grille, underlaid with opaque black filter foam. The visible features, which are optimised for practical use of the compact subwoofer, are two ergonomic recessed grips, various stacking recesses to reduce slippage when stacking the same and compatible systems and the M20 thread for the spacer tube, as well as 2 solid metal inserts to attach the optional transport cover with wheels. At the front, a SpeakON connection is positioned discreetly behind the brand logo for the cabling in cardioid mode. The design of the bass reflex tunnel prevents the emergence of disturbing flow noises, right up to the limit. The coated housing is reinforced by frames to suppress resonance and for optimum reverse damping.

The K&F NOMOS LS II is equalised by the K&F SystemAmps. The subwoofer can be used in many different ways. Several combinations, such as an individual system or a cluster of 3 for a cardioid setup – also with the NOMOS LT – are possible. Based on its 'modular principle', a practical feature of the NOMOS series is mechanical compatibility of the NOMOS LS II with the NOMOS LT. In addition, the numerous presets of the SystemAmps also enable flexible and consistently high-quality solutions, also at the control side. For example, cardioid operation combined with subwoofers from the NOMOS series provides many advantages, such as the qualitative improvement in sound due to the increased directivity in the low-frequency range, astonishingly high reverse damping of up to -24 dB and the associated prevention of disturbing emissions.


The sum of all these features makes the K&F NOMOS LS II an extremely powerful, musical and professional tool, which clears the way for what is really important – the directed and creative design of acoustic impressions.

K&F NOMOS LS II	
Design	Bass reflex system
Operation with	K&F PLM+ Series, K&F D Series, K&F SystemRack ¹
Lower cut-off frequency	33 Hz (-10 dB) 38 Hz (-3 dB)
Coverage	Omnidirectional (a cluster of 3 or in combination with the NOMOS LT can be driven in cardioid)
Power handling nominal	750 watts
Power handling program	1.500 watts
Power handling peak	3.000 watts
Max. SPL	136 dB (SPL peak/1 m/half space)
Impedance nominal	8 Ω
Loudspeaker per channel	See matrix
Components	15" subwooferchassis, 57 mm peak-to-peak excursion, inside and outside ventilated voice coil gap for reduced power compression, aluminium demodulating ring for very low distortion
Connectors	2 x speakON® 4-pol NLT4MP (+1/-1) (back) 1 x speakON® 4-pol NLT4MP (+1/-1) (front) IN parallel to OUT
Enclosure	
	15 mm birch multiplex with highly resilient Polyurea synthetic coating in RAL 9005 (black), 8 ergonomical butterfly handles, 8 non-abrasive plastic sliders, 8 stacking grooves for save stacking of NOMOS LS II, NOMOS LT and Line 212, 2 locking profiles for optional transport cover with 4 x 100 mm transport castors, additional speakON®-connector hidden behind the rotatable logo on the front grille, ball-proof steel grille with black acoustic foam behind the grille
Dimensions (W x H x D)	541 x 471 x 640 mm
Weight	30,3 kg
Colour	RAL 9005 (black) RAL special colour
Options	'Suspension' with 3 K&F VariPoints
Accessories	See catalogue or visit www.kling-freitag.com




¹ Discontinued

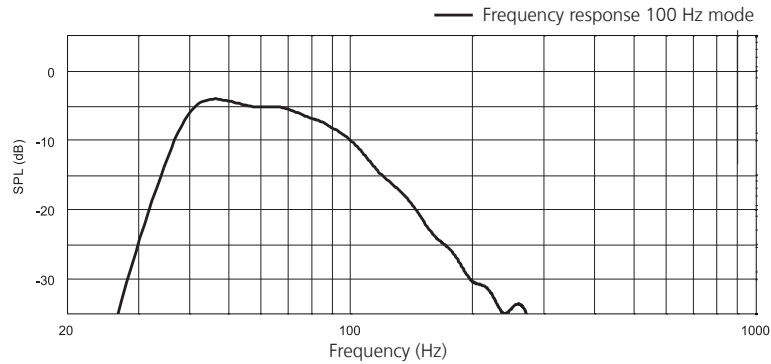

Cardioid



Hypercardioid



All measurements under free field conditions. Frequency patterns 1/6 octave averaged. Coverage and polar pattern 1/3 octave averaged. The manufacturer reserves the right to make product alterations to improve product quality without prior notice. Errors excepted. Attenuation factor depends on setting and configuration.

