

# K&F NOMOS XLT

- High-performance 2 x 18" subwoofer
- Operation with K&F SystemAmps
- Frequency response 24 Hz (-10 dB)
- Maximum sound pressure level of 141 dB (SPL peak/1 m/half space)



The K&F NOMOS XLT is a compact 18" bass reflex subwoofer intended for the highest demands. Equipped with two 18" premium chassis with a neodymium magnet and 100 mm voice coil, this subwoofer is to be operated over the K&F SystemAmps only – a combination which guarantees, especially in pro. RENTAL operations, maximum operating reliability, perfect performance and compatibility in the 'dry hire' business. The NOMOS XLT in both single and multiple applications is ideal for the low frequency response of the K&F line arrays SEQUENZA and the full range systems GRAVIS, CA-, Line Series and the horn-loaded ACCESS T5/T9.

As with the complete range, the NOMOS XLT has a discreet and functional design. The front of the speaker is protected by a grille, underlaid with opaque black filter foam. The visible features, which are optimised for practical use of the compact subwoofer, are two ergonomic recessed grips, various stacking recesses to reduce slippage when stacking the same and compatible systems and the M20 thread for the spacer tube, as well as 2 solid metal inserts to attach the optional transport cover with wheels. At the front, a SpeakON connection is positioned discreetly behind the brand logo for the cabling in cardioid mode. The design of the bass reflex tunnel prevents the emergence of disturbing flow noises, right up to the limit. The coated housing is reinforced by frames to suppress resonance and for optimum reverse damping.

The K&F NOMOS XLT is equalised by the K&F SystemAmps. The subwoofer can be used in many different ways. Several combinations, such as an individual system or a cluster of 3 for a cardioid setup – also with the NOMOS XLS – are possible. Based on its 'modular principle', a practical feature of the NOMOS series is mechanical compatibility of the NOMOS XLT with the NOMOS XLS. In addition, the numerous presets of the SystemAmps also enable flexible and consistently high-quality solutions, also at the control side. For example, cardioid operation combined with subwoofers from the NOMOS series provides many advantages, such as the qualitative improvement in sound due to the increased directivity in the low-frequency range, astonishingly high reverse damping of up to -24 dB and the associated prevention of disturbing emissions.

The sum of all these features makes the K&F NOMOS XLT an extremely powerful, musical and professional tool, which clears the way for what is really important – the directed and creative design of acoustic impressions.

## K&F NOMOS XLT


<b>Design</b>	Bass reflex system
<b>Operation with</b>	K&F PLM+ Series, K&F D Series, K&F SystemRack <sup>1</sup>
<b>Lower cut-off frequency</b>	24 Hz (-10 dB) 27 Hz (-3 dB)
<b>Coverage</b>	Omnidirectional (a cluster of 3 or in combination with the NOMOS LS II can be driven in cardioid)
<b>Power handling nominal</b>	1,500 watts
<b>Power handling program</b>	3,000 watts
<b>Power handling peak</b>	6,000 watts
<b>Max. SPL</b>	141 dB (SPL peak/1 m/half space)
<b>Impedance nominal</b>	4 Ω
<b>Loudspeaker per channel</b>	See matrix
<b>Components</b>	2 x 18" subwooferchassis, 57 mm peak-to-peak excursion, inside and outside ventilated voice coil gap for reduced power compression, aluminium demodulating ring for very low distortion
<b>Connectors</b>	2 x speakON® 4-pol NLT4MP (+1/-1) (back) 1 x speakON® 4-pol NLT4MP (+1/-1) (front) IN parallel to OUT

## Enclosure


15 mm birch multiplex with highly resilient Polyurea synthetic coating in RAL 9005 (black), 8 ergonomical butterfly handles, 8 non-abrasive plastic sliders, 8 stacking grooves for save stacking of NOMOS XLS, NOMOS XLT and Line 212, 2 locking profiles for optional transport cover with 4 x 100 mm transport castors, additional speakON®-connector hidden behind the rotatable logo on the front grille, ball-proof steel grille with black acoustic foam behind the grille

<b>Dimensions (W x H x D)</b>	1191 x 591 x 740 mm
<b>Weight</b>	80.5 kg
<b>Colour</b>	RAL 9005 (black) RAL special colour
<b>Options</b>	'Suspension' with 3 K&F VariPoints
<b>Accessories</b>	See catalogue or visit <a href="http://www.kling-freitag.com">www.kling-freitag.com</a>




<sup>1</sup> Discontinued

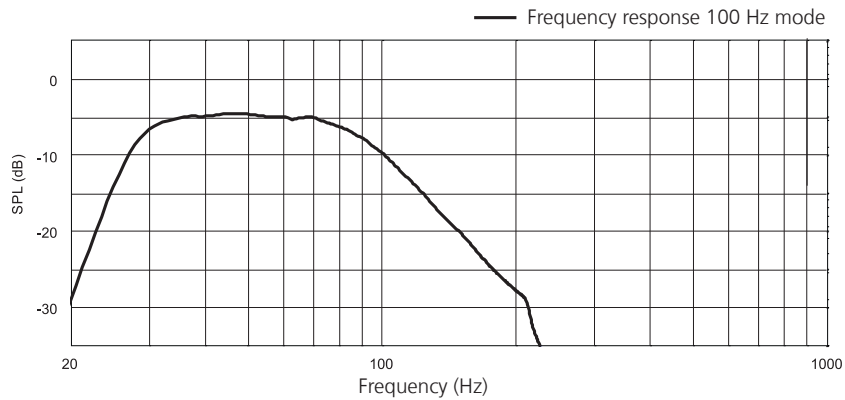

### Kardioid



### Hyperkardioid



All measurements under free field conditions. Frequency patterns 1/6 octave averaged. Coverage and polar pattern 1/3 octave averaged. The manufacturer reserves the right to make product alterations to improve product quality without prior notice. Errors excepted. Attenuation factor depends on setting and configuration.

